

PIVOT PARA PORTAS VAI-DEM OU BATEMTE /
FLUSH HINGE FOR DOUBLE ACTION OR REBATED DOORS /
PIVOTE PARA PUERTA VAI-DEM O DE BATEMTE


IN.05.215.HO (WITH HOLD OPEN)

Pivot hidr ulico com paragem a 90  /
Hydraulic pivot with hold open 90 /
Pivote hidr ulico con retencion 90 .






IN.05.215 (WITHOUT HOLD OPEN)

Pivot hidr ulico sem paragem /
Hydraulic pivot without hold open /
Pivote hidr ulico sin retencion.

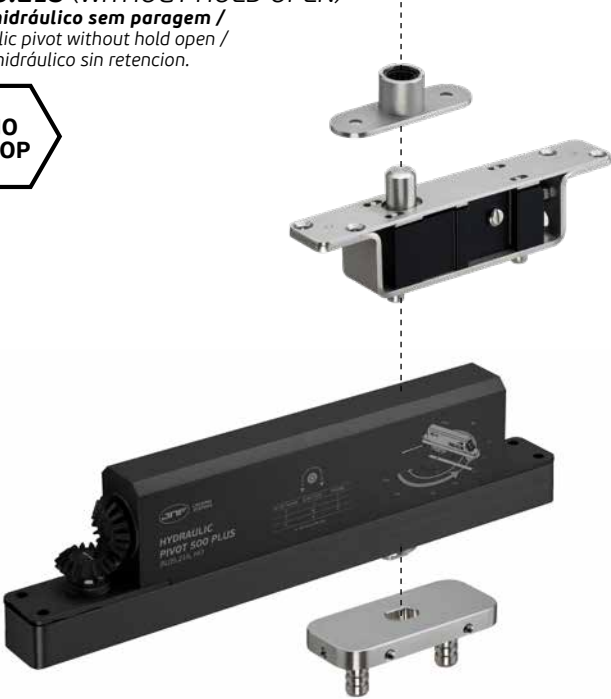

Sistema pivotante hidr ulico para portas at  350kg. As portas podem ser de abertura simples ou de vai-ven, e com espessura desde 40mm. O sistema fica oculto no interior da porta, apenas com uma pequena base no pavimento, com regul  o bidireccional e um ponto de rota  o no teto ou aro superior da porta com rolamento incorporado. / Hydraulic pivoting system for doors up to 350kg. The doors can be single or double action, with thickness from 40mm. The system is hidden inside the door, with only a small base on the floor, with bidirectional regulation and a rotation point on the roof or upper frame of the door with built-in bearing. / Sistema de pivote hidr ulico para puertas hasta 350kg. Las puertas pueden ser de acci n simple o doble, con espesores a partir de 40mm. El sistema est  oculto en el interior de la puerta, con solo una peque a base en el suelo, con regul  n bidireccional y un punto de rotaci n en el techo o marco superior de la puerta con rodamiento incorporado.

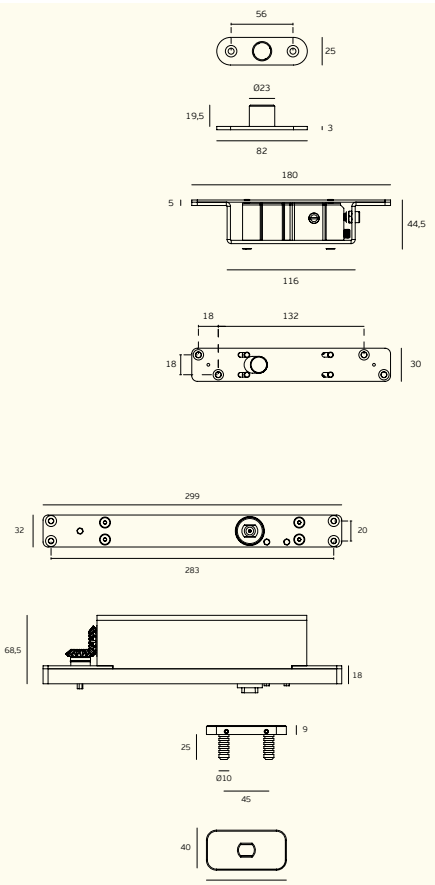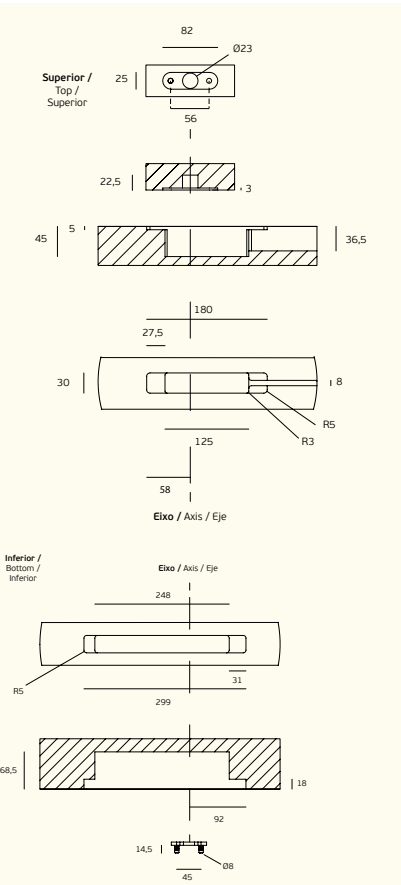

350 PLUS
HYDRAULIC
PIVOT

SISTEMA PIVOTANTE HIDR ULICO PARA PORTAS AT  350KG /
HYDRAULIC PIVOTING SYSTEM FOR DOORS UP TO 350KG /
SISTEMA PIVOTANTE HIDR ULICO PARA PUERTAS HASTA 350KG

RECOMENDADA PARA APLICA  O EM ESPA OS UTILIZADOS
POR PESSOAS COM MOBILIDADE CONDICIONADA E CRIAN AS /
RECOMMENDED FOR USE IN AREAS USED BY PEOPLE WITH
REDUCED MOBILITY AND CHILDREN /
RECOMIENDADA PARA APLICACION EN ZONAS UTILIZADAS
POR PERSONAS CON MOVILIDAD REDUCIDA Y NI OS.

